


icListen Firmware Update

1. Use the supplied update from Ocean Sonics or download the latest firmware update from Ocean Sonics Resource Site: <https://iclisten.com/users-firmware/>
2. Follow the icListen Quick Start to plug in and connect to the hydrophone.
3. Open Marco and find the IP address of the hydrophone.
4. Use the IP address of your hydrophone from Marco and enter it in the Host field.

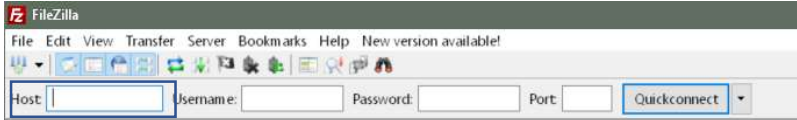

5. Leave the remaining spots blank and click **Quickconnect**.
6. FileZilla will connect to the hydrophone and open the icListen folders in the right window below: **Remote Site** location.

The screenshot shows the FileZilla interface with the following callouts:

- Status of Connection:** Points to the status bar at the top of the FileZilla window, which displays messages like "Directory listing of '/home/icListen' successful".
- Remote Site: Data from icListen:** Points to the right-hand pane showing the remote site structure with folders like 'home', 'icListen', 'Config', 'Data', and 'update', and a list of files with columns for filename, size, type, last modified, permissions, and owner.
- Local Site: Your Computer:** Points to the left-hand pane showing the local site structure with folders like 'Videos', 'Public', 'Windows', 'Windows.old', 'D:', and 'E: (ADATA HV620)'.
- Download Progress:** Points to the bottom section of the FileZilla window, which includes a table for 'Server/Local file' and a 'Queued files' section.

7. Under **Local Site** (your computer)
 - a. Open to the location where the update file is saved. (If downloaded, it's usually in the Downloads folder).
8. Under **Remote Site** (icListen)
 - a. Open the "Update" Folder (/home/icListen/update).
9. Drag and drop the update (icu file) into the Updates Folder on the icListen (Remote Site).
10. Click the Reset button in Marco to complete the update.

The screenshot shows the Marco v2.0.3 interface. A red box highlights the 'Reset' button in the 'icListen HW #1711 Actions' section. Other buttons visible include 'Refresh', 'Clear', 'Export...', 'Configure...', and 'Open in Web Browser'.